


Type:	Installation cable	26.04.2016
	U/UTP Cat.5 4PR PVC 200 MHz	REV: 0
Ref:	XE100.101 XE100.102 XE100.103	G

Installation cable Cat.5 U/UTP 4PR PVC CPR Class E_{CA} 200 MHz

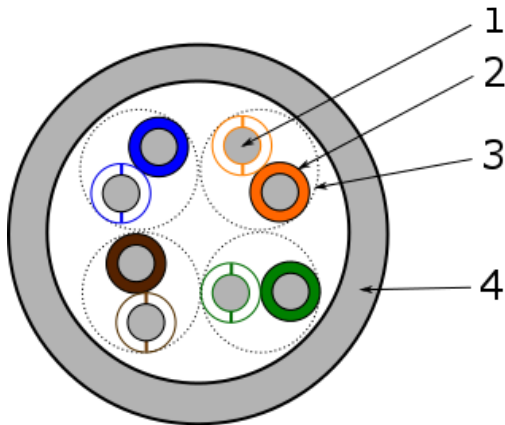

CONSTRUCTION:

- 1 – Conductor**
Material: solid bare annealed copper.
Nominal diameter: 24 AWG.
- 2 – Insulation**
Material: polyolefin.
Nominal diameter: 0.9 mm.
- 3 – stranded wires**
Pair: 2, twisted insulated conductors.
Number of pairs: 4, all twisted together.
- 4 – Outer sheath**
Material: PVC.
Color: grey (RAL 7035)

STANDARDS

ISO/IEC 11801
EN 50173
TIA 568 C.2
IEC 61156-5
EN 50288-3-1
IEC 60332-1-2

SUPPORTED APPLICATIONS

10BASE-T (IEEE 802.3)
100BASE-T (IEEE 802.3)
1000BASE-T (Gigabit Ethernet)
100BASE-VG-AnyLAN
100 Mbps TP-PMD (ANSI X3T9.5)
4/16 Mbps TOKEN RING (IEEE 802.5)
PoE/PoE+

ORDERING

XE100.101 – Box 305m
XE100.102 – Reel 500m
XE100.103 – Reel 1000m

MECHANICAL CHARACTERISTICS

Min. bending radius in operation	20	mm
Min. bending radius during installation	40	mm
Max. pulling tension	80	N
Nominal weight	29.5	kg/km
Nom. outer diameter	5.0	mm
Nom. wire diameter	24	AWG

ELECTRICAL CHARACTERISTICS @ 20°C

Max. DC Resistance:	93.8	Ω/km
Nom. Mutual Capacity @1kHz	56	nF/km
NVP:	68	%
Mean input Impedance:	100 ± 5 @ 100MHz	Ω
Propagation delay @10MHz:	max. 518	ns
Delay Skew:	max. 40	ns/100m
Segregation class	b	-
Max.operating voltage (V dc):	80	V DC
Max. DC intensity per conductor	3.3	A/mm ²

TEMPERATURE CHARACTERISTICS

Storage Temperature	-20 to +70	°C
Operating Temperature	-20 to +70	°C
During installation	-5° to +50	°C

ENVIRONMENTAL CHARACTERISTICS

Jacket material	PVC	
Flammability	Acc. to IEC 60332-1-2 EN50575; E _{CA} DoP 0001	
Calorific value	0,377	MJ/m

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Type:	Installation cable	26.04.2016
	U/UTP Cat.5 4PR PVC 200 MHz	REV: 0
Ref:	XE100.101 XE100.102 XE100.103	G

TRANSMISSION CHARACTERISTICS

Frequency	Attenuation	NEXT	PS-NEXT	ELFEXT ACR-F	PS-ELFEXT PSACR-F	ACR	PS-ACR	RL
MHz	dB/100m (max.)	dB (min.)	dB (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)
1	2.0	65.3	62.3	63.8	60.8	63.3	60.3	20.0
4	4.1	56.3	53.3	51.8	48.8	52.2	49.2	23.0
8	5.8	51.8	48.8	45.7	42.7	46.0	43.0	24.5
10	6.5	50.3	47.3	43.8	40.8	43.8	40.8	25.0
16	8.2	47.2	44.2	39.7	36.7	39.0	36.0	25.0
25	10.4	44.3	41.3	35.8	32.8	33.9	30.9	24.3
31.25	11.7	42.9	39.9	33.9	30.9	31.2	28.2	23.6
62.5	17.0	38.4	35.4	27.9	24.9	21.4	18.4	21.5
100	22.0	35.3	32.3	23.8	20.8	13.3	10.3	20.1
125*	24.9	33.8	30.8	21.9	18.9	9.0	6.0	19.4
155*	28.1	32.4	29.4	20.0	17.0	4.4	1.4	18.8
200*	32.4	30.8	27.8	17.8	14.8	---	---	18.0

* For information only

CABLE MARKING

FIBRAIN DATA CABLE CAT5E U/UTP 4PR 24 AWG 200MHZ NVP 68% PVC CPR CLASS Eca ISO/IEC11801 EN50173 ANSI/TIA/568-C.2 JJJJ XE100.10P OFRRRRRR . XXXXX M

Where

JJJJ: production year
P: 1 for 305m box, 2 for 500m reel, 3 for 1000m reel
OFRRRRRR: manufacturer order
XXXXX: length

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2